


Residential Roof

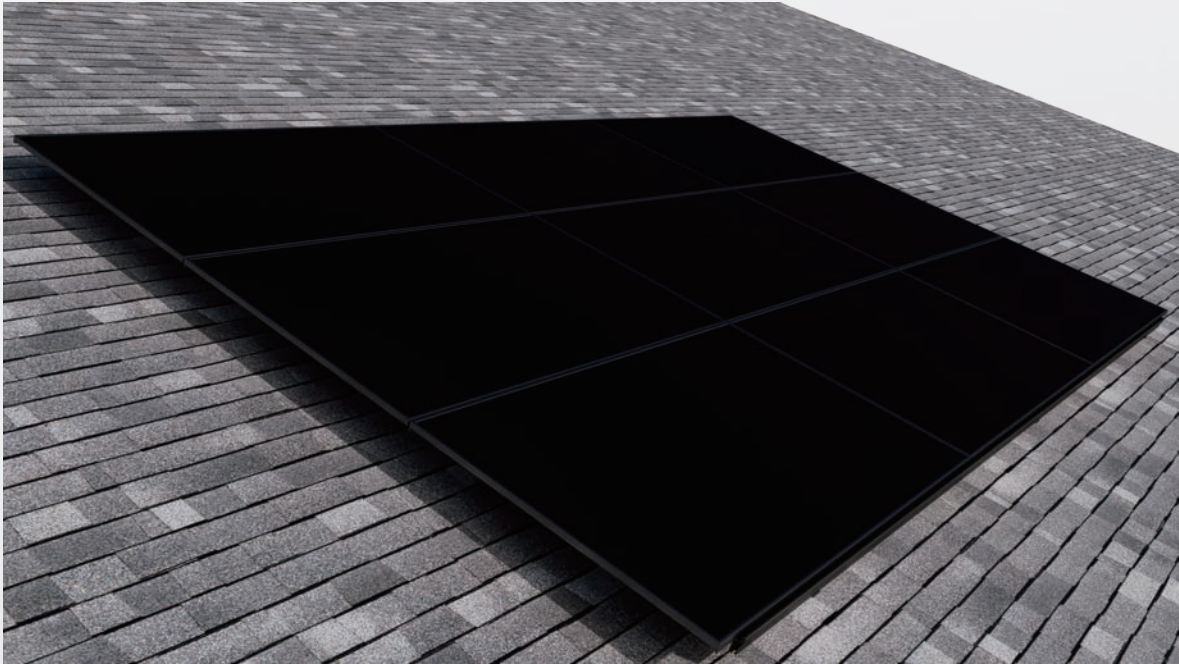

Model RnLm

Fastest Assembly

- Easy Installation
- Integrated Bonding

Safest

- Wind Resist
- Secured Fixing

Sleekest

- All Black Design
- Appealing

Manufactured Product

- Modular
- Assembly Only

Specifications




Applicable Areas	Residential Roof
Foundation Type	MagicFrame Technology
Module Orientation	Landscape
Compatible Modules	Various (MagicFrame)
Frame Materials	Al
Mounting Materials	Al/others (MagicFrame)
Snow Load	<2.0KN/ m ²
Wind Load	< 63m/s
Warranty	10-year material warranty
Design Standards	National/Industry/Local standards
Operating Temperature Range	-40~ +85°C
Design Life	≥25 years



Edge Locking



Tongue&Groove



Zero Clamp



Integrated Clip